



THE CLICK ENTRANCE MATTING

ts[®]
treadsafe
distributors

BasMat[®]



THE BASMAT ADVANTAGES

-  ■ Basmat is an entrance matting system composed of **aluminium profiles** and textile, plastic or brush inserts, with the choice of several colors.
-  ■ The combination of different materials acts as a dirt barrier **preserving the cleanliness** of the building's flooring, helping to increase its durability, and reducing the consumption of pollutant products. Basmat also helps to **prevent accidents** due to slipping.
-  ■ Thanks to its **unique click assembly system**, the period between projection and installation is reduced to the minimum compared with similar products.
-  ■ Basmat can be installed **recessed or on a surface**. A range of accessories are available: ramps and framing profiles.
-  ■ Its system of assembly, without linking wires or connectors, **allows the cutting of profiles** on the site of installation, if necessary, and to make the appropriate adaptations.
-  ■ Basmat **can be installed anywhere**; from houses to public buildings, offices, hotels, restaurants, industrial facilities, banks or shops. It is suitable for heavy traffic and the harshest conditions.
-  ■ The profiles are inserted one into another, without using small pieces of connectors that could weaken the structure. As a result, Basmat is characterized by its **great resistance and durability**, thanks to its 100% aluminium structure.
-  ■ Thanks to its click assembly system, Basmat can be installed in places where it is **impossible to place similar mats** of other manufacturers; irregular forms, on ramps, between automatic doors, between glass or screens, underneath skirtings, in laminated floors, on stairs, etc.
-  ■ Basmat is specially conceived to **cover large surfaces**, without dividing the mat in smaller parts, in contrast to other similar products.
-  ■ In contrast to other aluminium mats, it is **not necessary to lift it up in order to clean it**, using a vacuum cleaner is enough.
-  ■ In case of deterioration, **the textile, plastic or brush strips, can be replaced** by removing them from the profiles and inserting new ones.

Basmat finishing strips can be replaced easily



Maintenance and cleaning is very easy by just using a vacuum cleaner





100% aluminium structure



Basmat Atenea

Recessed installation
9 mm high

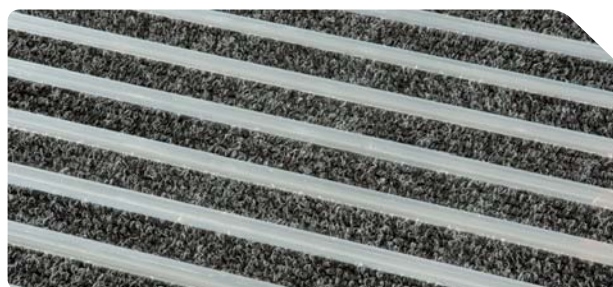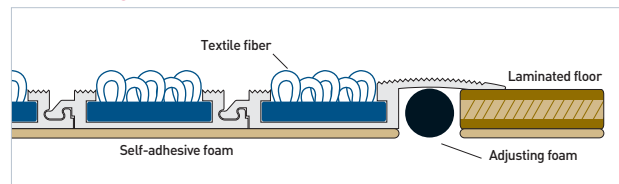


Height	9 mm.
Profile width	33 mm.
Profiles per linear metre	30 units.
Structure	Aluminium.
Finishes	Textile, plastic, brushes and mixed.
Isolation and consolidation	Polypropylene self-adhesive foam with gauze.
Available accessories	Framing profiles and corner pieces.
Difficulty level	Low.
Indicated for	Laminated floors and floors of all heights.
Maximum dimensions (1 unit)	6 metres wide, and without limits in the walking direction.



Textile finish



Plastic finish





Brushes Finish

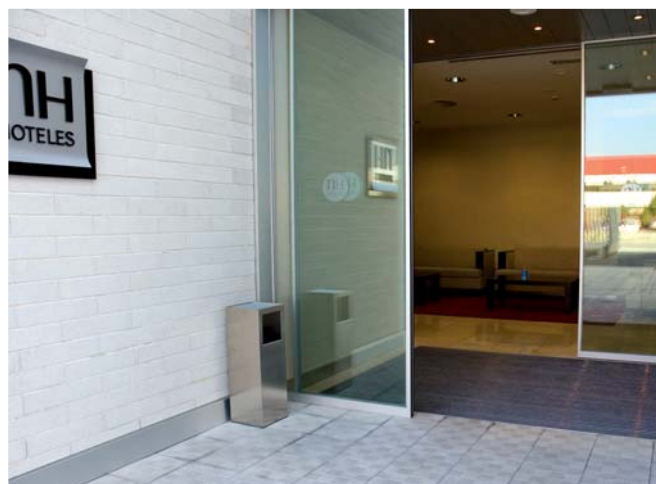

Basmat Hermes

Recessed installation

17 mm high

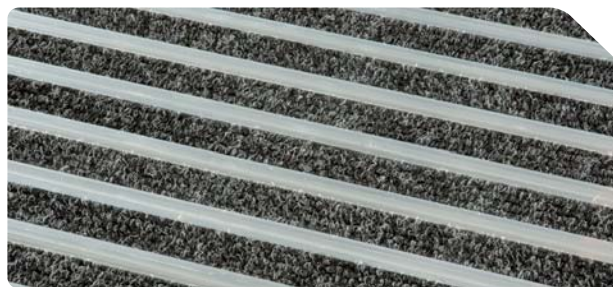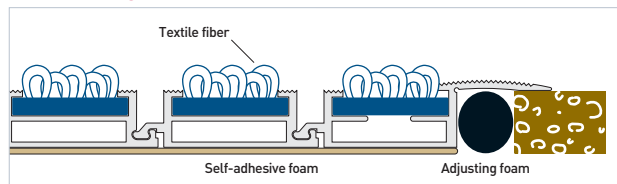


Height	17 mm.
Profile width	33 mm.
Profiles per linear metre	30 units.
Structure	Aluminium.
Finishes	Textile, plastic, brushes and mixed.
Isolation and consolidation	Polypropylene self-adhesive foam with gauze.
Available accessories	Framing profiles and corner pieces.
Difficulty level	Low.
Indicated for	Recessed installation.
Maximum dimensions (1 unit)	6 metres wide, and without limits in the walking direction.


Textile finish



Plastic finish





Brushes Finish



Basmat Apolo

Recessed installation
22 mm high

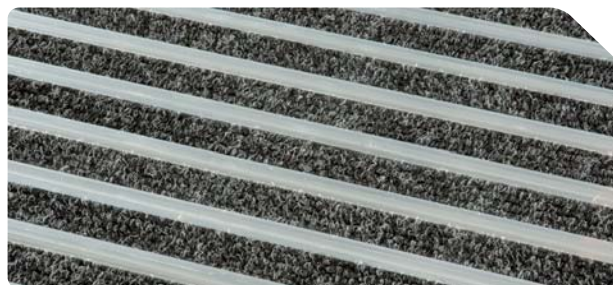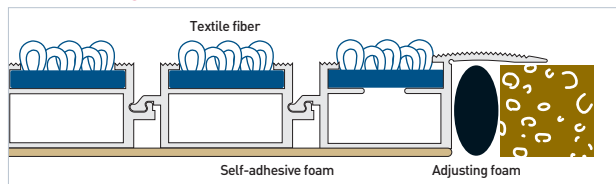


Height	22 mm.
Profile width	33 mm.
Profiles per linear metre	30 units.
Structure	Aluminium.
Finishes	Textile, plastic, brushes and mixed.
Isolation and consolidation	Polypropylene self-adhesive foam with gauze.
Available accessories	Framing profiles and corner pieces.
Difficulty level	Low.
Indicated for	Recessed installation.
Maximum dimensions (1 unit)	6 metres wide, and without limits in the walking direction.


Textile finish



Plastic finish




Brushes Finish



Basmat Atenea + ramps


Surface installation

9 mm high

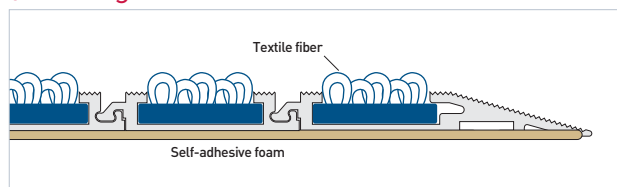


Height	9 mm.
Profile width	33 mm.
Profiles per linear metre	30 units.
Structure	Aluminium.
Finishes	Textile, plastic, brushes and mixed.
Isolation and consolidation	Polypropylene self-adhesive foam with gauze.
Available accessories	Ramps and corner pieces.
Difficulty level	Low.
Indicated for	Places where there is no mat well.
Maximum dimensions (1 unit)	6 metres wide, and without limits in the walking direction.


Textile finish



Plastic finish





Brushes Finish



Basmat Cronos

Recessed installation
17 mm high. Special width

**SPECIAL
WIDTH**

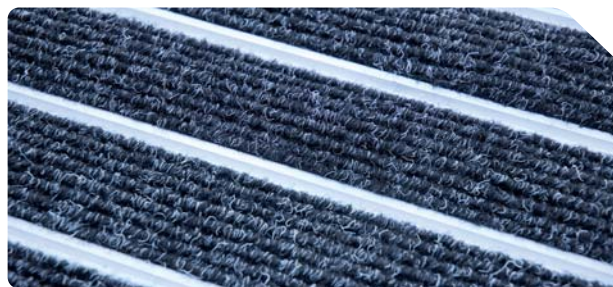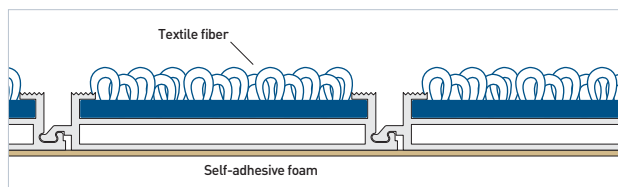

Height	17 mm.
Profile width	69 mm.
Profiles per linear metre	14 units.
Structure	Aluminium.
Finishes	Textile.
Isolation and consolidation	Polypropylene self-adhesive foam with gauze.
Available accessories	Framing profiles and corner pieces.
Difficulty level	Low.
Indicated for	Recessed installation. Large installations.
Maximum dimensions (1 unit)	6 metres, and without limits in the walking direction.

Textile finish




Basmat Zeus

Recessed installation


17 mm high. Special to cover large surfaces

**CONTINUOUS
STRUCTURE**

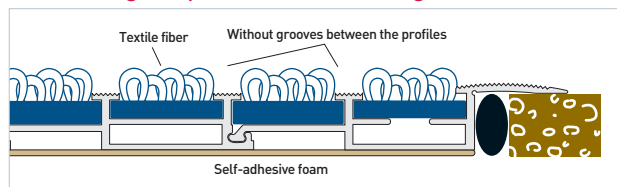


Height	17 mm.
Profile width	52 mm.
Profiles per foot	20 units.
Structure	Aluminium.
Finishes	Textile, plastic, brushes and mixed.
Isolation and consolidation	Polypropylene self-adhesive foam with gauze.
Available accessories	Framing profiles and corner pieces.
Difficulty level	Medium.
Indicated for	Recessed installation. Large installations.
Maximum dimensions (1 unit)	6 metres wide, and without limits in the walking direction.


Textile finish



Plastic finish



Brushes Finish




ACCESSORIES

Accessories for recessing


Valid for all recessed models



Side profile for recessing

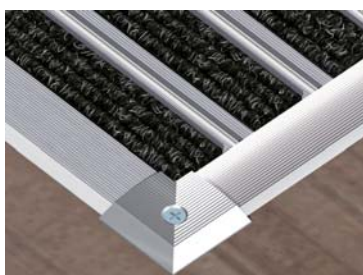

Corner piece to be screwed

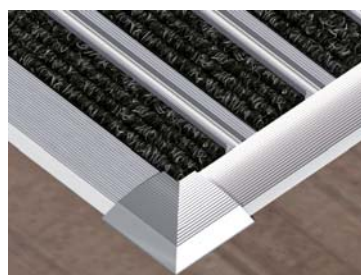

Corner piece to glue

LED light strip

Initial and/or final profile. Basmat Hermes, Zeus, Apolo and Cronos



Other accessories

Basmat Atenea




"J" profile



Initial accessory



Intermediate/final profile



Stair nose

Basmat Hermes, Zeus and Cronos




"J" profile



Intermediate/final profile

Basmat Apolo



"J" profile



Intermediate/final profile

MODELS CLASSIFICATION


By profile height

 9 mm ATENEA	 17 mm HERMES	 22 mm CRONOS APOLO
--	---	--

By finish

 TEXTILE	 PLASTIC	 BRUSHES
--	--	--

By profile width

 33 mm ATENEA HERMES APOLO	 69 mm CRONOS
--	---

By profile appearance

With grooves between the profiles  ATENEA HERMES APOLO CRONOS	Without grooves between the profiles  ZEUS
--	--

MARKETING

Cardboard display stand

Ref. MKT0000001

1500 mm high
440 mm wide
540 mm deep



Desktop cardboard display


Ref. MKT0000005

280 mm high
210 mm wide
250 mm deep



Samples



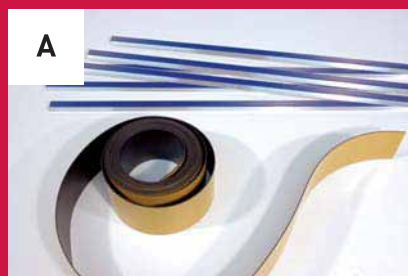

EASY INSTALLATION PATENTED CLICK SYSTEM

ASSEMBLY DIRECTIONS

1. Clean and prepare the surface where **Basmat** is going to be placed.
2. Place the self-adhesive black foam strips parallel to each other approx 20 cm apart with the adhesive part facing upwards. Peel off the protective paper a few centimetres.
3. Place the first **Basmat** profile.
4. Keep placing the **Basmat** profiles clicking one into the next one and sticking them down to the black foam.
5. Keep peeling the protective paper as you are adding more profiles.
6. Continue the assembly process until the last bar. This is the reference to cut the self-adhesive foam. Adjust **Basmat** to the available space.

Basmat®

ts[®]
treadsafe
distributors

Treadsafe Distributors Ltd.
Unit 11, Finglas Business Park,
Tolka Valley Road, Dublin 11, Ireland
Tel: +353 1 834 0683
Fax: +353 1 834 0689
Email: sales@treadsafe.ie

www.treadsafe.ie

